ATLAS Sp. z o.o., 91-222 Łódź, ul. Św. Teresy 105
Headquarters: 91-421 Łódź, ul. Kilińskiego 2, tel. +48 42 631 88 00
www.atlas.com.pl, e-mail: export@atlas.com.pl

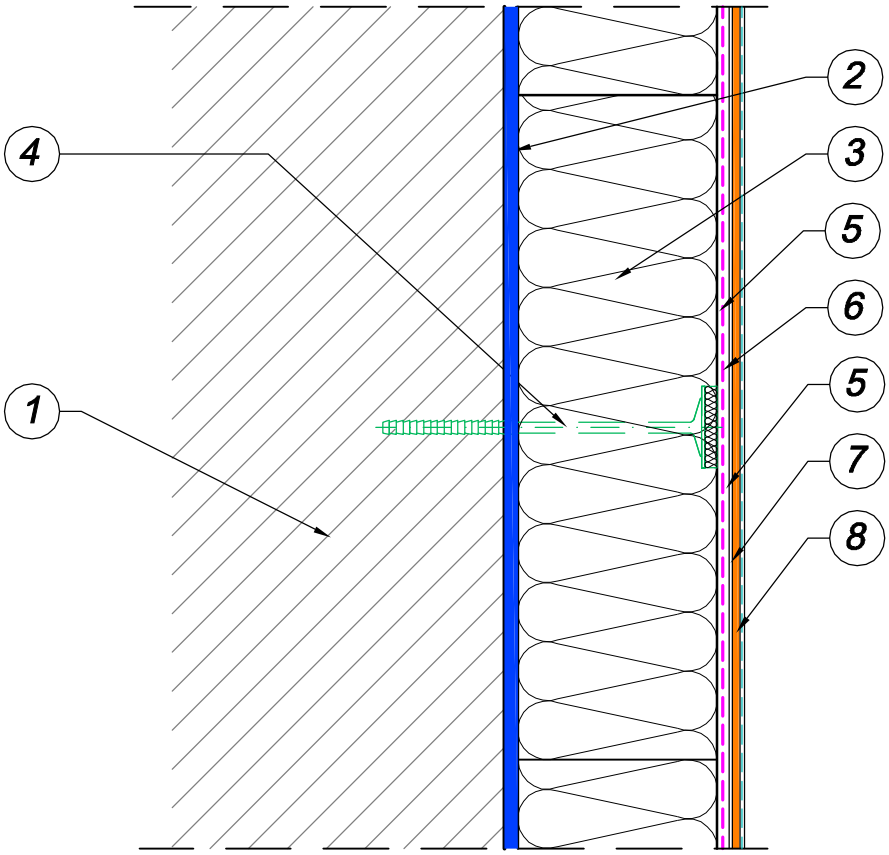

1. WALL:

- concrete or made of ceramic, concrete, lime-sand, cellular concrete or stone elements

2. ADHESIVE FOR POLYSTYRENE

- mineral adhesive — ATLAS HOTER S
  AVAL KT 53

3. THERMAL INSULATION

- standard polystyrene EPS
  thickness according to thermal calculations

4. ADDITIONAL FIXING

- mechanical fixings (anchors), determined in the insulation design, admitted to trading

5. BASECOAT

- dispersive adhesive — ATLAS STOPTER K-100

6. GLASS FIBRE MESH

- ATLAS 165 mesh (to obtain increased mechanical resistance of 120 J, one must use the combination of two meshes: ATLAS 150 mesh and 340 armoured mesh)

7. RENDER

- silicone — ATLAS SILICONE RENDER
  AVAL SILICONE RENDER

8. PAINT (OPTIONALLY)

- silicone — ATLAS SALTA N
  AVAL KT 48

No. 1.7.1 ATLAS PREMIUM set