ATLAS Sp. z o.o., 91-222 Łódź, ul. Św. Teresy 105
Headquarters: 91-421 Łódź, ul. Kilińskiego 2, tel. +48 42 631 88 00
www.atlas.com.pl, e-mail: export@atlas.com.pl

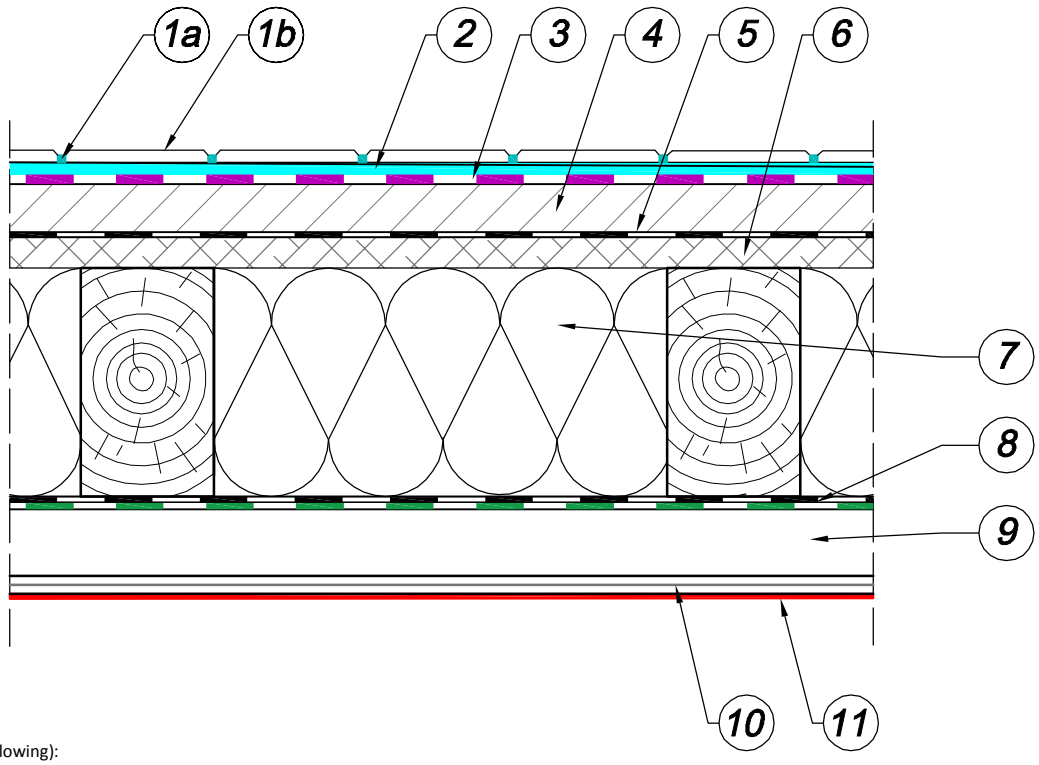

1. Finishing layer

1a. Grout (one of the following):

Atlas ARTIS grout	1-25 mm
Atlas TIGHT grout	1-7 mm
Atlas EPOXY grout	1-10 mm
ATLAS WIDE grout	4-16 mm
Atlas ARTIS silicone	
Atlas SILTON S silicone	

1b Ceramic tile

2. Adhesive (one of the following):

Atlas GEOFLEX	2-15 mm	C2TE
Elastified adhesive mortar Atlas	2-10 mm	C1TE
Atlas ATUT	2-10 mm	C1T
Atlas MIG 2	2-5 mm	C1FTE
Atlas ELASTYK	2-10 mm	C2TE
Atlas PLUS	2-10 mm	C2TE S1
Atlas PLUS WHITE	2-10 mm	C2TE S1
Atlas PLUS MEGA	4-20 mm	C2E S1
Atlas PLUS MEGA WHITE	4-20 mm	C2E S1
Atlas PLUS EXPRESS	2-5mm	C2FTE S1

3. Under tile waterproof insulation

Woder DUO	Two-component waterproofing
Woder E	Elastic sealing mass
Woder W	Elastic sealing mass

4. Pressure layer - cement screed

Atlas POSTAR 10	thickness up to 100 mm*	CT-C25-F5-A15
Atlas POSTAR 20	thickness up to 80 mm*	CT-C20-F4
Atlas POSTAR 40	thickness up to 80 mm*	CT-C30-F6-A22
Atlas POSTAR 80	thickness up to 80 mm*	CT-C40-F7-A12
Atlas POSTAR 100	thickness up to 80 mm*	CT-C50-F7-A15

5. Protective layer
   PE membrane. Recommended thickness: 0.3mm - 0.4 mm
6. Wooden ceiling
   OSB
6. Thermal insulation layer
   Mineral wool thickness acc. thermal calculations
7. Vapour control membrane
   PE membrane (heat-welded or glued)
8. System grid
   Atlas M-SYSTEM 3G
9. Plasterboards
10. Finishing coat (one of the following)
    GIPSAR UNI
    PLUS GIPSAR
    Atlas GIPS RAPID

*If the floor is arranged with a separating layer, the minimum screed thickness is 35 mm.

No. 3.1.7 Floor on a wooden ceiling without underfloor heating