


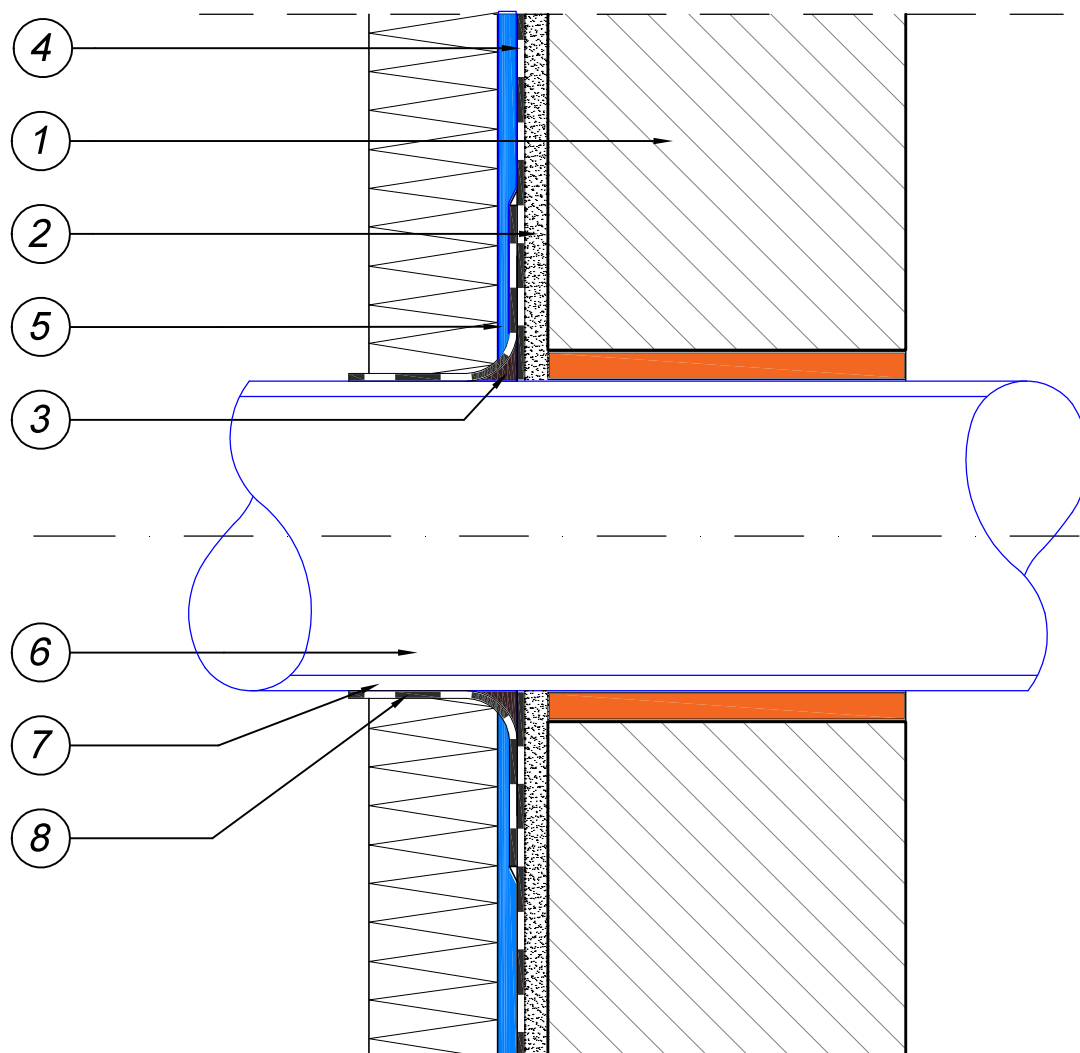

1. Foundation wall
2. Traditional render (optionally)
3. Cove of 2 cm radius, made of Nexler Bittflex 2K polymer-bitumen KMB compound
4. Foundation wall waterproofing - Atlas Woder Duo elastic sealing mortar (min. 2 coatings)
5. Adhesive for polystyrene boards, e.g. Nexler Bittflex 2K / 2KP / Nexler WM polymer-bitumen KMB compound
6. Firmly mounted service pipe
7. Preparation of service pipe (roughening, defatting, etc.)
8. Pipe passage sealing: Nexler Bittflex 2K polymer-bitumen KMB compound /Nexler Bittflex 2KP / Nexler WM

dwg no. 2.2

Pipe passage sealing - vertical insulation of elastic sealing mortar - risk of dampness