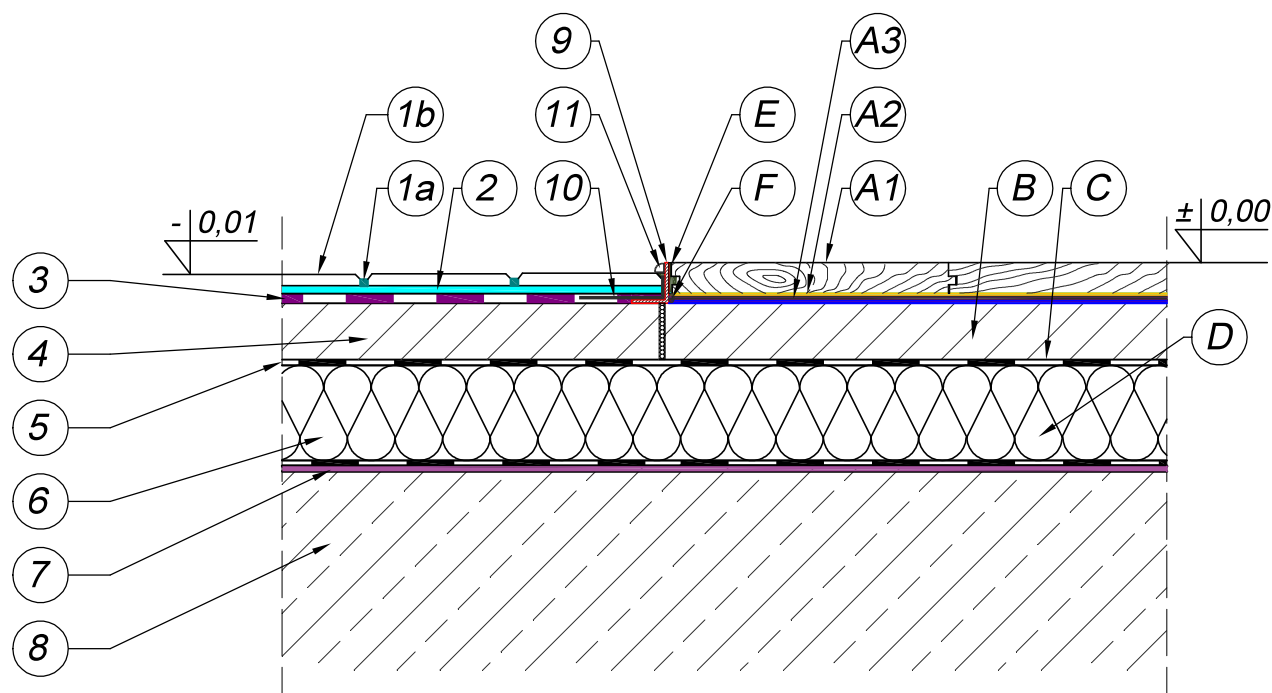



**FLOOR - WET ROOM****1. Finishing layer****1a. Grout (one of the following):**

|                                  |         |
|----------------------------------|---------|
| Atlas CERAMIC grout              | 1-20 mm |
| Atlas ELASTIC grout              | 1-7 mm  |
| Atlas EPOXY grout                | 1-10 mm |
| Atlas ELASTIC SANITARY SILICONE  | 4-25 mm |
| Atlas SANITARY SILICONE SILTON S | 4-25 mm |

**1b. Ceramic tile****2. Adhesive (one of the following):**

|                           |         |          |
|---------------------------|---------|----------|
| Atlas OK! ELASTICISED     | 2-10 mm | C1 TE    |
| Atlas ATUT                | 2-10 mm | C1 T     |
| Atlas ELASTYK             | 2-10 mm | C2 TE    |
| Atlas PLUS                | 2-10 mm | C2 TE S1 |
| Atlas PLUS WHITE          | 2-10 mm | C2 TE S1 |
| Atlas GEOFLEX             | 2-15 mm | C2 TE    |
| Atlas GEOFLEX WHITE       | 2-15 mm | C2 TE    |
| Atlas GEOFLEX EXPRESS     | 2-15 mm | C2 FT    |
| Atlas ULTRA GEOFLEX       | 2-15 mm | C2 TE S1 |
| Atlas ULTRA GEOFLEX WHITE | 2-15 mm | C2 TE S1 |

**3. Under-tile waterproofing**

|                 |                             |
|-----------------|-----------------------------|
| Atlas WODER DUO | Two-component waterproofing |
| Atlas WODER E   | Elastic sealing mass        |
| Atlas WODER W   | Elastic sealing mass        |
| Atlas WODER SX  | Sealing mortar              |

**4. Pressure layer - cement screed \***

|                    |             |               |
|--------------------|-------------|---------------|
| Atlas POSTAR 10    | 40 - 100 mm | CT-C25-F5-A12 |
| Atlas POSTAR 20    | 40 - 80 mm  | CT-C20-F4     |
| Atlas POSTAR 60    | 40 - 100 mm | CT-C30-F5-A9  |
| Atlas POSTAR 80    | 40 - 80 mm  | CT-C40-F7-A9  |
| Atlas SMS 60 ULTRA | 30 - 60 mm  | CT-C25-F7     |

**5. Protective layer**

PE membrane. Recommended thickness: 0.3 mm - 0.4 mm

**6. Thermal insulation layer (thickness acc. thermal calculation)**EPS 100 boards or harder  
XPS boards**7. Vapour control membrane** PE membrane (heat-elded or glued)**8. Structural slab****9. Corner profile (aluminium)****10. Sealing tape**Atlas Sealing Tape  
Atlas hydroband 3G**11. Threshold trim (aluminium or PCV)****FLOOR - DRY ROOM****A. Finishing layer - wooden panel**A1 Panel  
A2 Separating membrane  
A3 Soundproofing membrane**B. Pressure layer (screed) according to p.4****C. Protective layer according to p. 5****D. Thermal insulation layer according to p.6****E. Silicone sealing**Atlas SANITARY ELASTIC SILICONE  
Atlas SANITARY SILICONE SILTON S**F. Atlas Backer Rod**

\*The thickness of screed layer in a floating floor system made of a specific product is greater than its nominal minimum thickness.

**dwg no. 3.3.5**

Threshold between dry and wet room