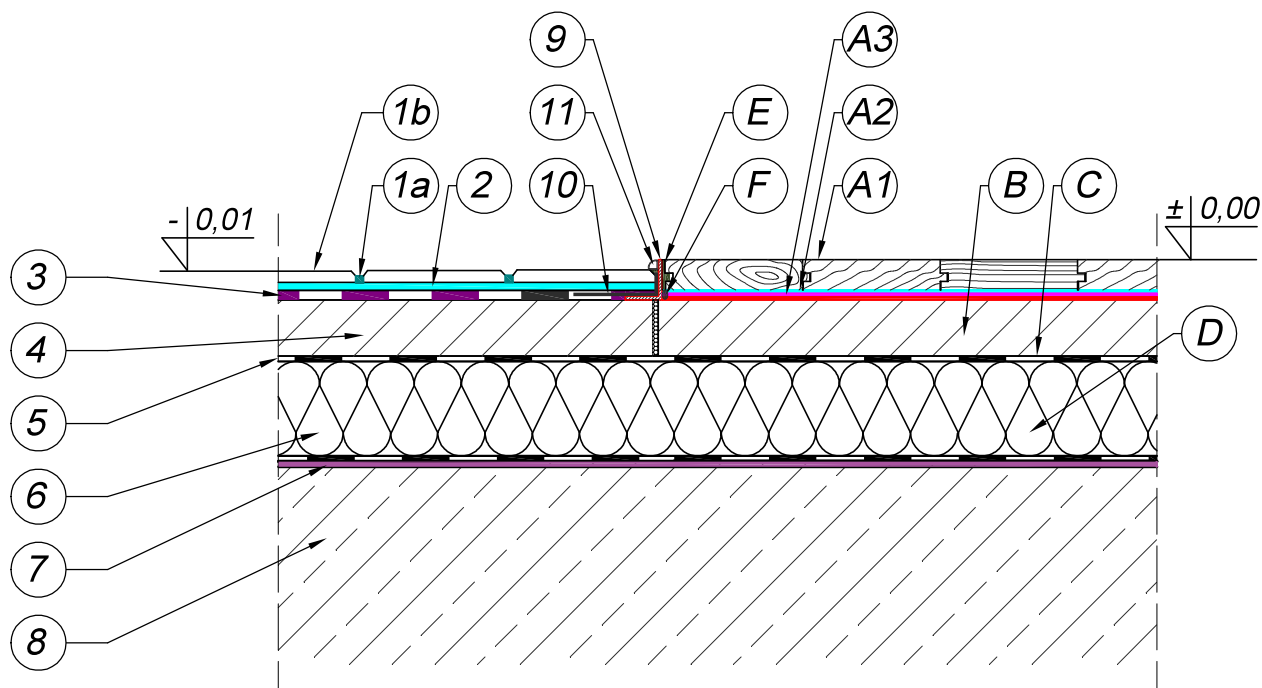



**FLOOR - WET ROOM****1. Finishing layer****1a Grout (one of the following):**

Atlas CERAMIC grout	1-20 mm
Atlas ELASTIC grout	1-7 mm
Atlas EPOXY grout	1-10 mm
Atlas ELASTIC SANITARY SILICONE	4-25 mm
Atlas SANITARY SILICONE SILTON S	4-25 mm

1b Ceramic tile**2. Adhesive (one of the following):**

Atlas OK! ELASTICISED	2-10 mm	C1 TE
Atlas ATUT	2-10 mm	C1 T
Atlas ELASTYK	2-10 mm	C2 TE
Atlas PLUS	2-10 mm	C2 TE S1
Atlas PLUS WHITE	2-10 mm	C2 TE S1
Atlas GEOFLEX	2-15 mm	C2 TE
Atlas GEOFLEX WHITE	2-15 mm	C2 TE
Atlas GEOFLEX EXPRESS	2-15 mm	C2 FT
Atlas ULTRA GEOFLEX	2-15 mm	C2 TE S1
Atlas ULTRA GEOFLEX WHITE	2-15 mm	C2 TE S1

3. Under-tile waterproofing

Atlas WODER DUO	Two-component waterproofing
Atlas WODER E	Elastic sealing mass
Atlas WODER W	Elastic sealing mass
Atlas WODER SX	Sealing mortar

4. Pressure layer - cement screed *

Atlas POSTAR 10	10 - 100 mm	CT-C25-F5-A12
Atlas POSTAR 20	10 - 80 mm	CT-C20-F4
Atlas POSTAR 60	10 - 100 mm	CT-C30-F5-A9
Atlas POSTAR 80	10 - 80 mm	CT-C40-F7-A9
Atlas SMS 60 ULTRA	30 - 60 mm	CT-C25-F7

5. Protective layer

PE membrane. Recommended thickness: 0.3 mm - 0.4 mm

6. Thermal insulation layer (thickness acc. thermal calculation)EPS 100 boards or harder
XPS boards**7. Vapour control membrane** PE membrane (heat-elded or glued)**8. Structural slab****9. Corner profile (aluminium)****10. Sealing tape**Atlas Sealing Tape
Atlas hydroband 3G**11. Threshold trim (aluminium or PCV)****FLOOR - DRY ROOM****A. Finishing layer - parquet**A1 Parquet
A2 Adhesive for parquet
A3 Primer for the adhesive**B. Pressure layer (screed) according to p.4****C. Protective layer according to p. 5****D. Thermal insulation layer according to p.6****E. Silicone sealing**Atlas SANITARY ELASTIC SILICONE
Atlas SANITARY SILICONE SILTON S**F. Atlas Backer Rod**

*The thickness of screed layer in a floating floor system made of a specific product is greater than its nominal thickness.

dwg no. 3.3.6

Threshold between ceramic floor and parquet floor