


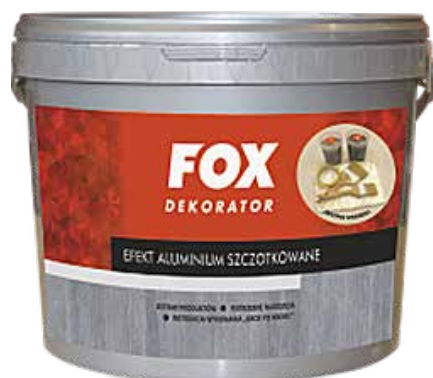

BRUSHED ALUMINUM EFFECT

set of products for 10 m² of decoration

USE

Decorative or protective painting of walls and ceilings indoors. Also for decorative coating of plasters and paints.

Place of use: walls and ceilings indoors.

Types of substrate: plaster, concrete, stone, plasterboards, wood-like boards and any other sound, clean and appropriately prepared substrate.

PROPERTIES

Easy in use; well coating; decorative; imparts pearl shade to the coated surface; facilitates cleaning.

APPLICATION

Substrate preparation

The substrate should be: sufficiently sound, stable, free of layers which would impair product bonding, in particular dust, dirt, lime, oils, fats, residues of paints and other.

Product preparation

The product is delivered ready to use. Mix well before use in order to unify its consistency.

Colouring

Ready to use product.

Application

Plan the order and way of application before work, check the final effect on a small sample first!

Apply PRODUCT 1 with a paintbrush moved vertically. Simultaneously apply a little bit of PRODUCT 2 upon wet surface; form streaks imitating aluminum sheet. In order to smooth the joint between the products, rub streaks with crossing moves with a paintbrush used for application of PRODUCT 1. Remember to end this move vertically all the time. Work in phases on limited areas.

Depending on the expected final effect, both products can be additionally applied upon wet decoration surface. Leave to dry completely.

CONSUMPTION

Average consumption:

Product 1: approx. 0.06 kg/m² (1 kg of product for approx. 15 m² of decoration). Product 2: approx. 0.04 kg/m² (1 kg of product for approx. 25 m² of decoration).

The actual consumption depends on substrate texture and absorptiveness, quality of substrate preparation, expected decorative effect, user's experience.

TECHNICAL DATA

Temperature of use: from +5°C up to +30°C, the time of drying can extend in low temperature and/or high humidity

Number of coats: 1-2

Time of drying: tack-free surface after approx. 2 h

Application of subsequent coat: after 3 h

Dilution: not recommended

Technical requirements: Hygienic Certificate issued by Polish Institute of Hygiene

Shelf life: 24 months

IMPORTANT ADDITIONAL INFORMATION

- Clean the tools with water just after use.
- Keep out of reach of children. Avoid contact with skin and eyes. After direct contact with eyes – wash with plenty of water and contact a doctor. Wear protective gloves/protective clothing/eye protection/face protection. If swallowed: Immediately call a doctor, show package or label. Follow the instructions of the Safety Data Sheet.
- Keep in tightly sealed containers in dry conditions. Protect against overheating and freezing.

PACKAGING

Set of products for 10 m².

The above information constitutes basic guidelines for the application of the product and does not release the user from the obligation of carrying out works according to engineering principles and OHS regulations.

At the time of publication of this product data sheet all previous ones become void.
Date of update: 2016-10-18



www.fox-dekurator.pl